

Deutsche
Qualität
Garantiert



132

HALF
CELLS

210
mm

CELL
SIZE



LID
RESISTANT



PID
RESISTANT



SALT CORROSION
RESISTANT




SAND
RESISTANT



AMMONIA
RESISTANT



HIGHLY STABLE
AND TOUGH

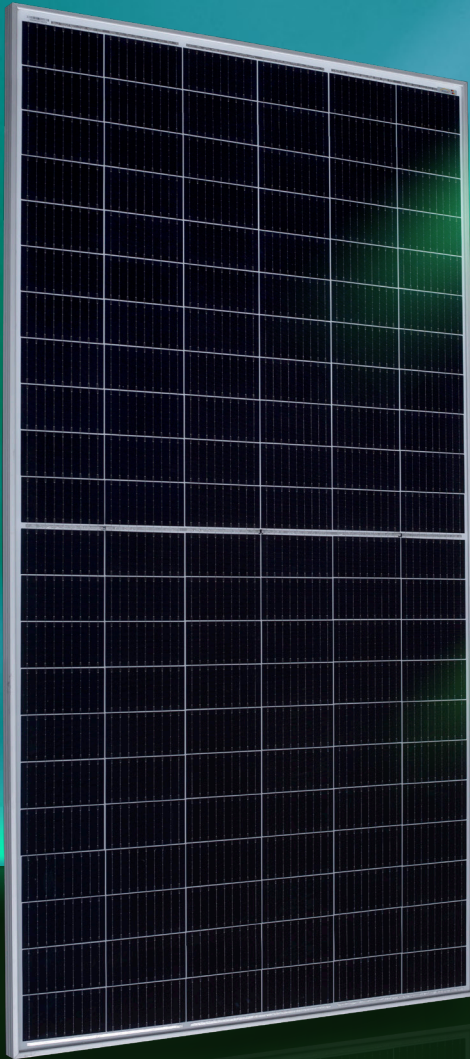

AURORA

HIGH ENERGY YIELD
RELIABILITY
DURABILITY

30

years
Performance
Guarantee

15

years
Product
Warranty

MONO-CRYSTALLINE PV MODULES
HALF-CUT CELLS • BIFACIAL • DOUBLE-GLASS


645W-665W

AE ME-132BD Series



IEC 61215
IEC 61730
Regular Production Surveillance
Type Tested and Monitored

IEC 62716 (Ammonia corrosion)
IEC 61701 (Salt mist corrosion)
IEC 60068 (Sand and dust)
IEC 62804 (PID resistance)



www.ae-solar.com

Mechanical and design specification




| | |
|-----------------|--|
| Cell type | Gallium-doped Mono c-Si PERC, Half-cut cells, 210 mm |
| No. of cells | 132 |
| Bifaciality | 70±5% |
| Glass | 2.0 mm, high transmission, AR coated, tempered |
| Encapsulation | POE |
| Back cover | 2.0 mm, high transmission solar glass, tempered |
| Junction box | IP 68 rated |
| Frame | 35 mm anodized Aluminium alloy |
| Cable | 1 x 4 mm ² , 350 mm length or customized |
| Connectors | MC 4 / MC 4 compatible |
| Dimension | 2384 mm x 1303 mm x 35 mm |
| Weight | 41 kg |
| Hail resistance | Max. Ø 25 mm at 23 m/s |
| Wind load | 2400 Pa/ 244 kg/ m ² |
| Mechanical load | 5400 Pa/ 550 kg/ m ² |

Packaging information

| | |
|-------------------------|--|
| Packaging configuration | 31 pcs / pallet |
| Loading capacity | 527 pcs / 40 HQ |
| Size / Pallet | 1350 mm x 1140 mm x 2500 mm (Stand on end) |
| Weight | 1310 kg / pallets |

Temperature ratings

| | | |
|--------------------------------------|--------|------------|
| Operating temperature | (°C) | -40 to +85 |
| Temp.coefficient of P _{max} | (%/°C) | -0.34 |
| Temp.coefficient of V _{oc} | (%/°C) | -0.25 |
| Temp.coefficient of I _{sc} | (%/°C) | 0.04 |
| Nom. operating temp. NOCT | (°C) | 43 ± 2 |

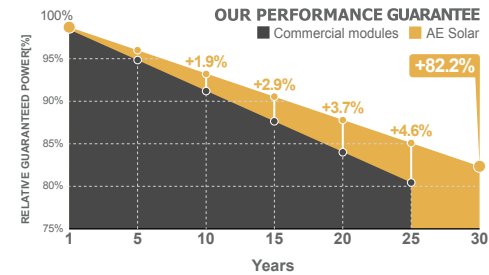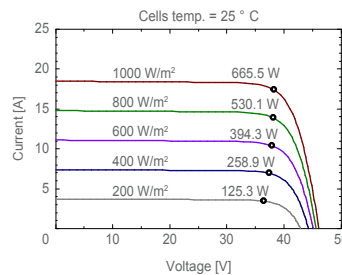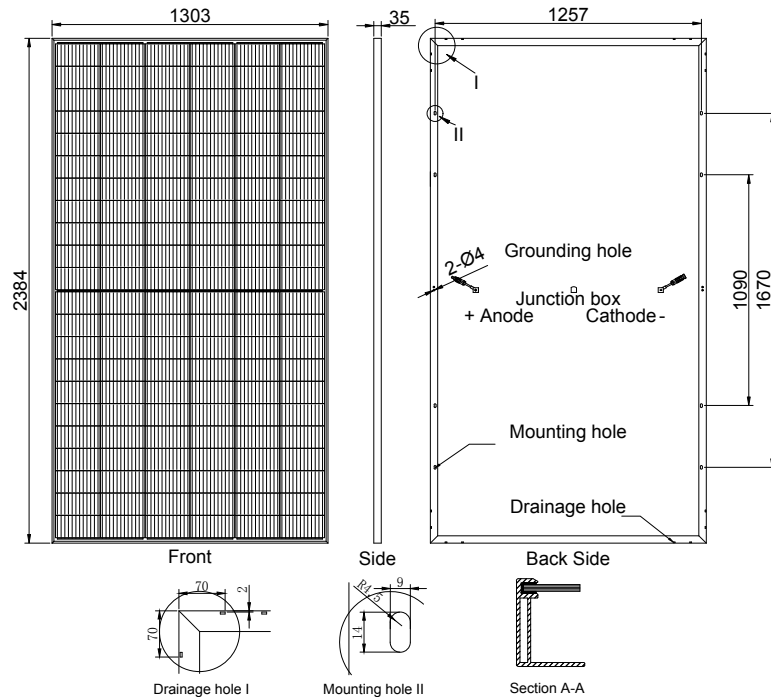

Electrical specifications (STC*): AE645ME-132BD AE650ME-132BD AE655ME-132BD AE660ME-132BD AE665ME-132BD

| Parameter | AE645ME-132BD | AE650ME-132BD | AE655ME-132BD | AE660ME-132BD | AE665ME-132BD | |
|----------------------------|-----------------------|---------------|---------------|---------------|---------------|-------|
| Nominal Max. Power | P _{max} (Wp) | 645 | 650 | 655 | 660 | 665 |
| Maximum operating voltage | V _{MPP} (V) | 37.20 | 37.40 | 37.60 | 37.80 | 38.00 |
| Maximum operating current | I _{MPP} (A) | 17.34 | 17.38 | 17.42 | 17.46 | 17.50 |
| Open-circuit voltage | V _{oc} (V) | 45.30 | 45.50 | 45.70 | 45.90 | 46.10 |
| Short-circuit current | I _{sc} (A) | 18.25 | 18.32 | 18.38 | 18.43 | 18.49 |
| Module efficiency | η (%) | 20.80 | 20.90 | 21.10 | 21.20 | 21.40 |
| Power tolerance | (W) | | | 0~+5 | | |
| Maximum system Voltage | (V) | | | 1500 | | |
| Maximum series fuse rating | (A) | | | 30 | | |

*STC: Standard test conditions (Irradiance 1000 W/m², Cell temperature 25°C and air mass of AM1.5)

Electrical specifications (NMOT*): AE645ME-132BD AE650ME-132BD AE655ME-132BD AE660ME-132BD AE665ME-132BD

| Parameter | AE645ME-132BD | AE650ME-132BD | AE655ME-132BD | AE660ME-132BD | AE665ME-132BD | |
|---------------------------|-----------------------|---------------|---------------|---------------|---------------|-------|
| Nominal Max. Power | P _{max} (Wp) | 484 | 488 | 492 | 496 | 500 |
| Maximum operating voltage | V _{MPP} (V) | 34.90 | 35.10 | 35.30 | 35.50 | 35.70 |
| Maximum operating current | I _{MPP} (A) | 13.87 | 13.90 | 13.94 | 13.97 | 14.00 |
| Open-circuit voltage | V _{oc} (V) | 42.20 | 42.40 | 42.60 | 42.80 | 43.00 |
| Short-circuit current | I _{sc} (A) | 14.60 | 14.66 | 14.70 | 14.74 | 14.79 |

*NMOT: Normal Module Operating Temperature (Irradiance 800 W/m², Ambient temperature 20°C, air mass of AM1.5 and wind speed of 1 m/s)

The specifications and characteristics contained in this datasheet may deviate slightly from our actual products due to the product developments and uncertainty of measurement devices. The specifications included in the datasheet are subject to change without prior notice.